

2020 Canvas NEO 2



A fast, rugged and sleek urban e-bike. Big wheels and tires for comfort, grip and momentum. Fully equipped to move you through the metropolis at speed.

Product Specification

Frame	SmartForm C2 Alloy, removable downtube battery, SAVE, tapered headtube, internal cable routing, 148x12mm thru-axle, post mount disc, motor protection, lock mount
Fork	BallisTec Carbon, 1-1/8" to 1.5" tapered steerer, OutFront 55mm offset, post mount disc, 15x110mm thru-axle, hidden cable routing
Rims	WTB STX i29 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400 15x110 / (R) Shimano MT400 12x148
Spokes	DT Swiss Champion
Tires	Schwalbe G-One Speed Performance, 29 x 2.35", RaceGuard, tubeless ready
Pedals	Cannondale Fitness
Crank	Bosch Gen3, 38T
Chain	Shimano HG93, 9-speed
Rear Cogs	Shimano HG200, 11-36, 9-speed
Rear Derailleur	Shimano Alivio
Shifters	Shimano Acera, 9-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 740mm
Grips	Cannondale Locking Grips
Stem	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0-degree
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings (Integrated steer stop size small only)
E-Bike Drive Unit	Bosch Active Line Plus 250W (20mph)
E-Bike	Bosch Purion

Display**E-Bike
Battery**

Bosch PowerTube 400Wh

**E-Bike
Charger**

Bosch 2a

Brakes

Shimano MT200 hydro disc, 180/180mm RT10 rotors

Saddle

Cannondale Ergo Urban

Seatpost


6061 Alloy, 31.6 x 350mm

Sizes

S, M, L, XL

Extra(s)

Lights - Herrmans H-Black MR4 front, Supernova E3 Tail Light rear, Tubus Wingee fender and pannier rack (8kg max capacity)

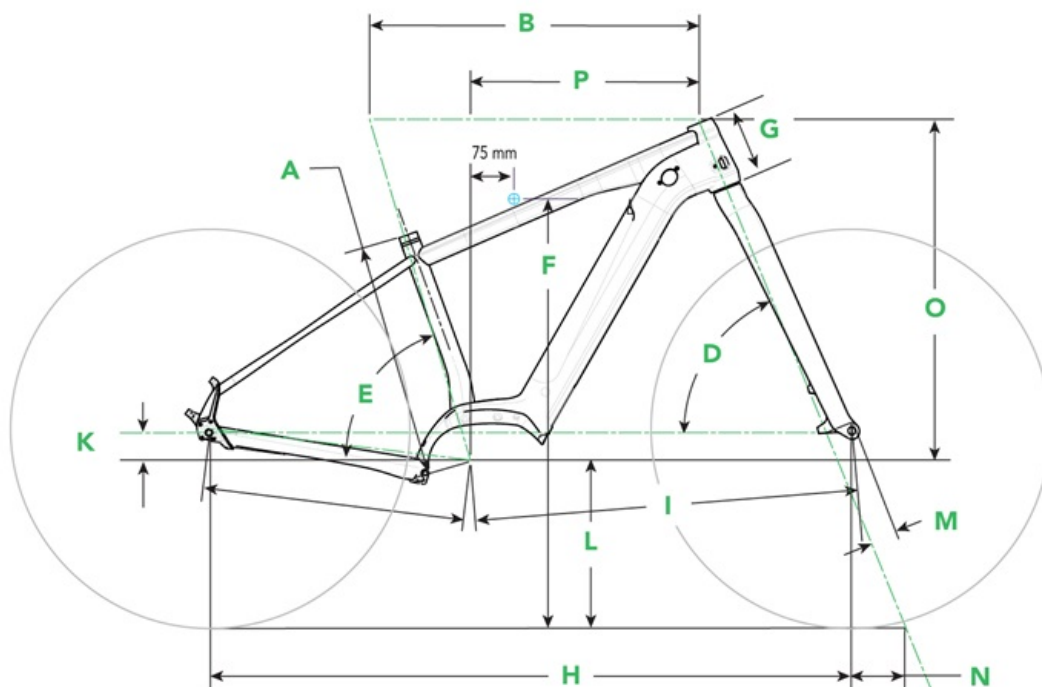

Canvas NEO 2

	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM)	38.0	43.5	48.5	53.5
B TOP TUBE HORIZONTAL (CM)	58.0	61.7	64.0	66.5
C TOP TUBE ACTUAL (CM)	N/A			
D HEAD TUBE ANGLE	68.0°	68.0°	68.0°	68.0°
E SEAT TUBE ANGLE EFFECTIVE	73.5°	73.5°	73.5°	73.5°
F STANDOVER (CM)	74.6	77.5	81.3	84.7
G HEAD TUBE LENGTH (CM)	12.8	12.8	13.6	14.4
H WHEELBASE (CM)	116.0	119.7	122.0	124.6
I FRONT CENTER (CM)	68.6	72.3	74.7	77.3
J CHAIN STAY LENGTH (CM)	47.9	47.9	47.9	47.9
K BOTTOM BRACKET DROP (CM)	5.7	5.7	5.7	5.7
L BOTTOM BRACKET HEIGHT (CM)	31.6	31.9	31.6	31.6
M FORK RAKE (CM)	5.5	5.5	5.5	5.5
N TRAIL (CM)	9.1	9.2	9.1	9.1
O STACK (CM)	62.8	62.8	63.5	64.3
P REACH (CM)	39.4	43.1	45.2	47.5